



STEP 2/b Roof installation instruction FR 6m/8m


Connect the cover elements with each other. For tents with uneven length of the side e.g.: 9m, 11m, 13m, 21m, 31m... remember that the 1 m extension was installed after the starting element. The starting part should be mounted at the front of the tent.

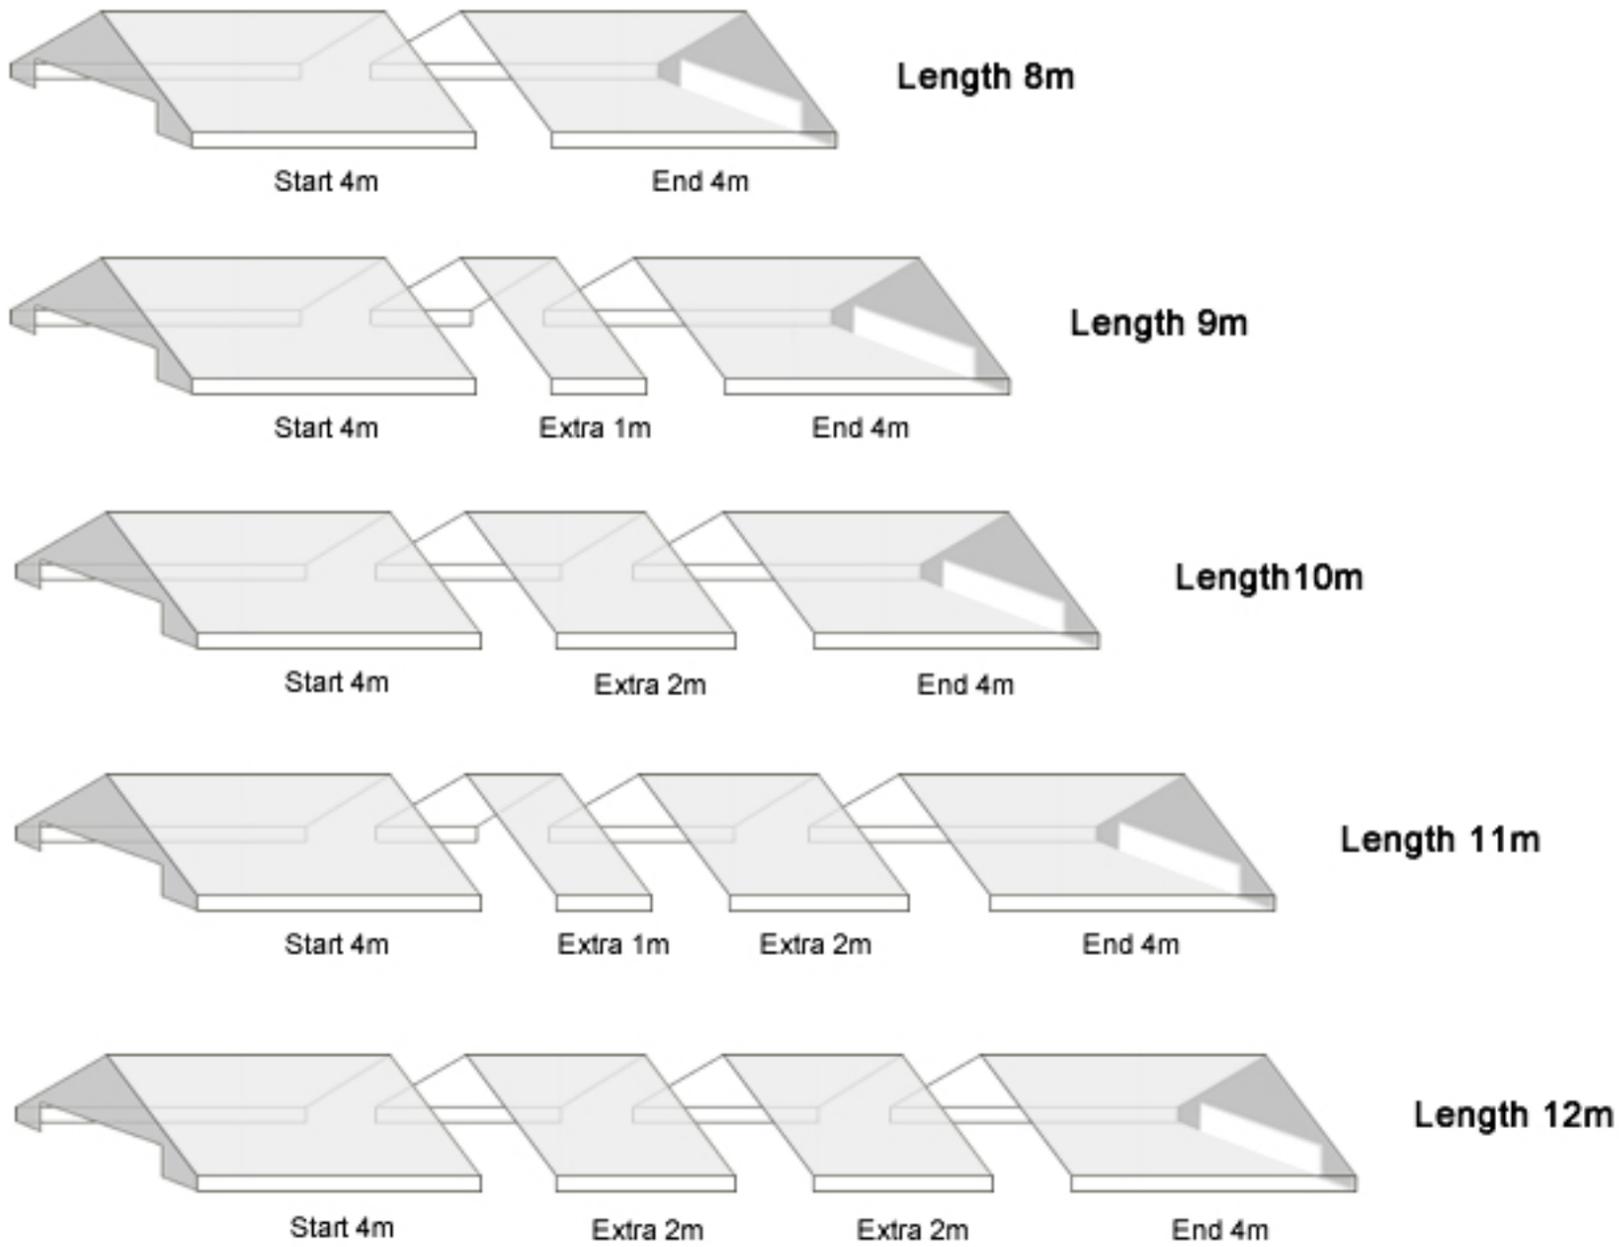

Put the roof cover gently on the construction. Then attach it to the roof frame using elastic rubbers with ball. The elastic rubbers should be installed alternately right - left and front and back.

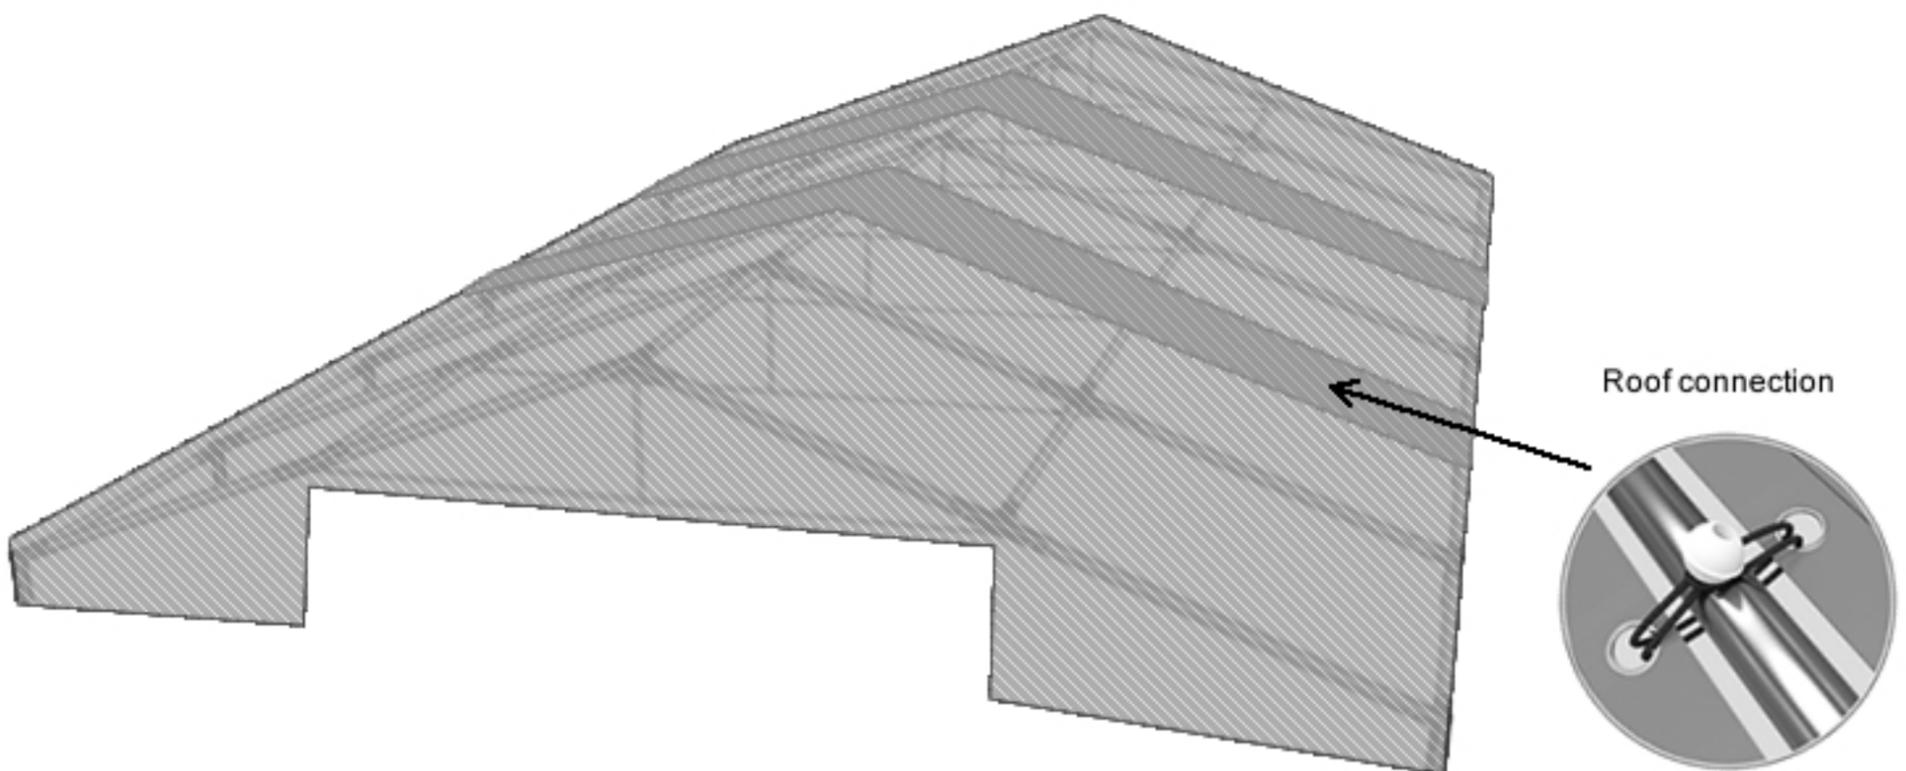

Pipes to attach the cover (27 and 28) should be installed on the inside of the tent.

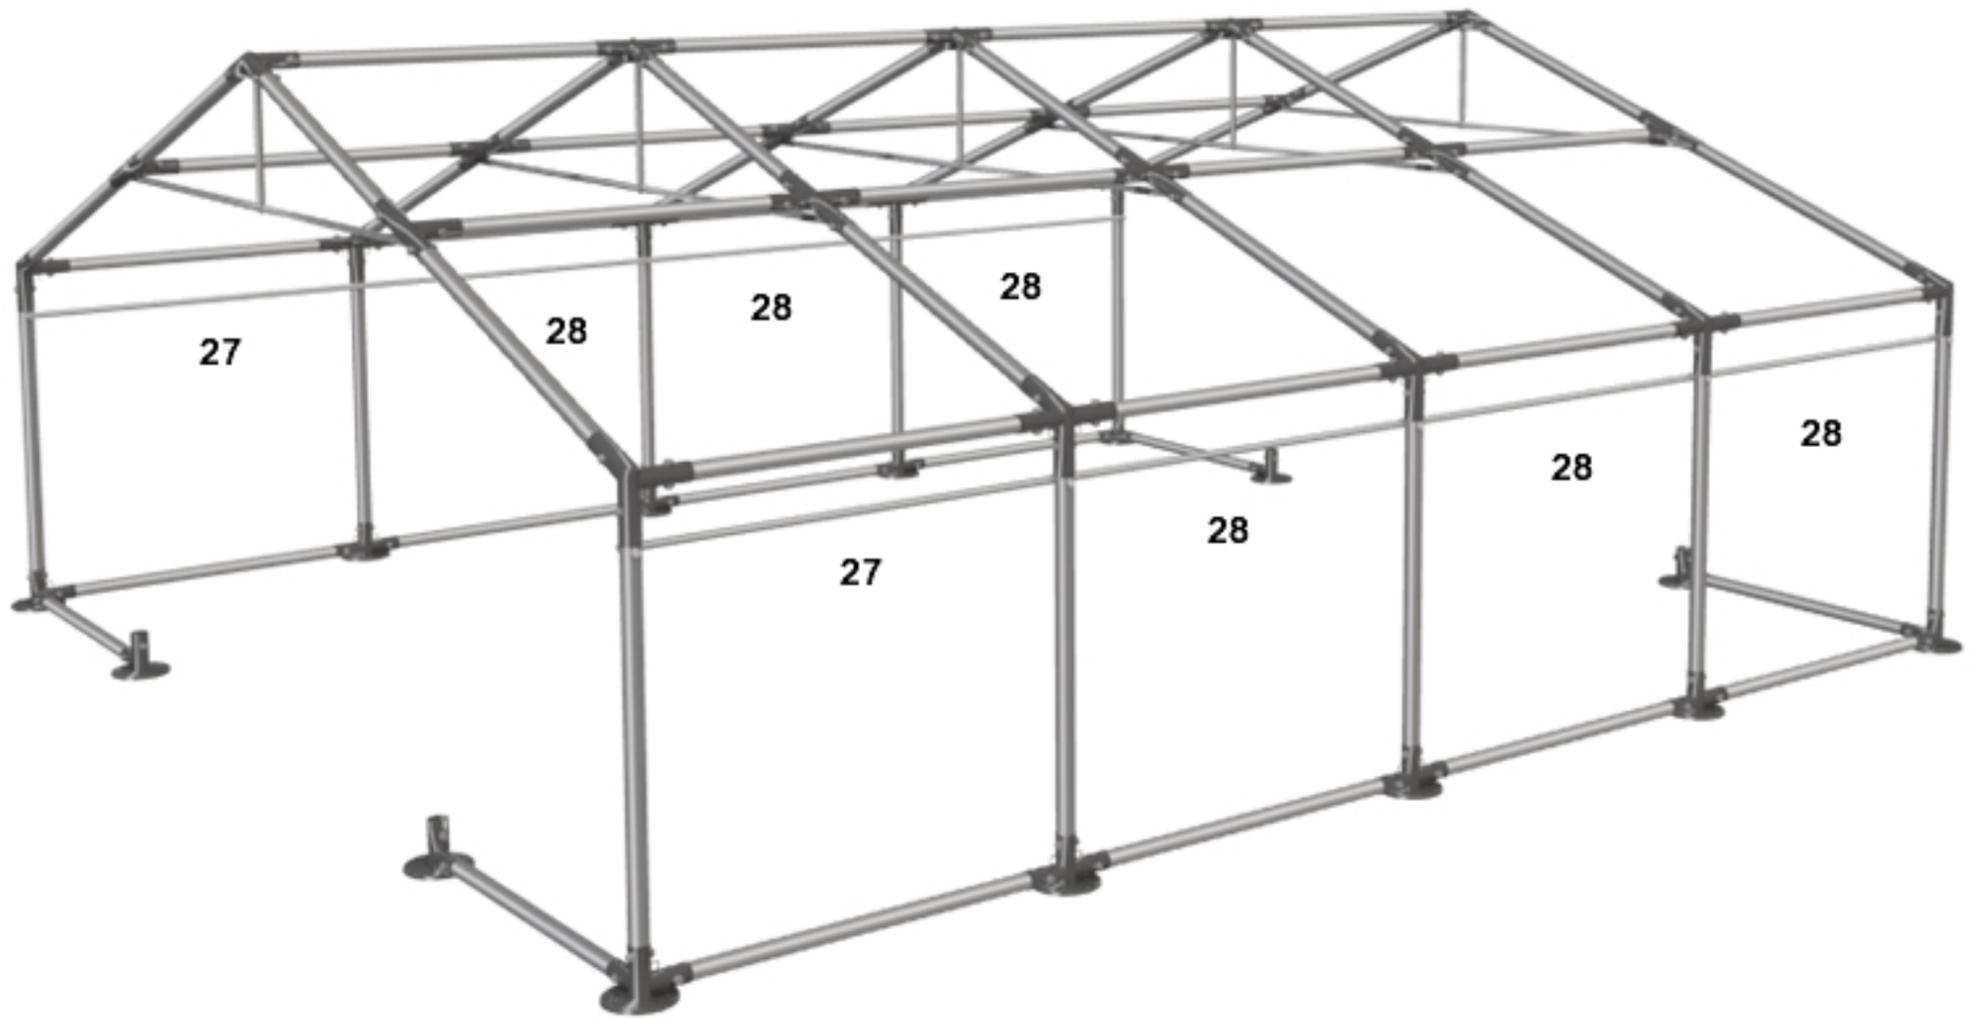

Pass the pipe number 30 through the cover's stitching. Connect pipe (30) with tube (27 or 28), using strings with clips. For tents with the 1m extension, instead of using tube (28) use tube (29). Instead of using tube (30) use tube (31).

